



Product Specification Sheet

Aurora Flood



A 1.0kW / 1.25kW symmetric flood luminaire for larger theatres and studios and general purpose display lighting.

Features

90° light beam is smooth and falls off evenly without visible high lights or shadows.

The extruded aluminium reflector guarantees repeatability of beam characteristics.

Robust construction from a combination of aluminium extrusions and formed steel panels.

Filter life is maximised by the dual air-flow chamber construction.

Filter frame size ensures an economic two frame cut out of a standard filter sheet.

The filter frame is flat ensuring it can be mounted into the luminaire with ease.

Re-lamp without removing the colour filter holder via the hinged front filter holder assembly.

Barndoor accessory available for beam masking.

Available configurations: single, with or without pole operated tilt; multi batten options as per the Aurora Cyc.

Lamps: 220V-240V

P2/12 1250W
33,750 lumens 200 hours average life

P2/7 1000W
26,000 lumens 200 hours average life

P2/10 625W
16,250 lumens 200 hours average life

Order codes

10AUFLD

Aurora Flood

10AUFLDPO

Aurora Flood with pole operation

20DBAU

Aurora Barndoor

20HC

Suspension Hookclamp

20SC

Safety Bond


Approvals

Compliant to CE standards.



Photometric data

Tests conducted using a standard 1250W, 240V, 189mm P2/12 lamp.

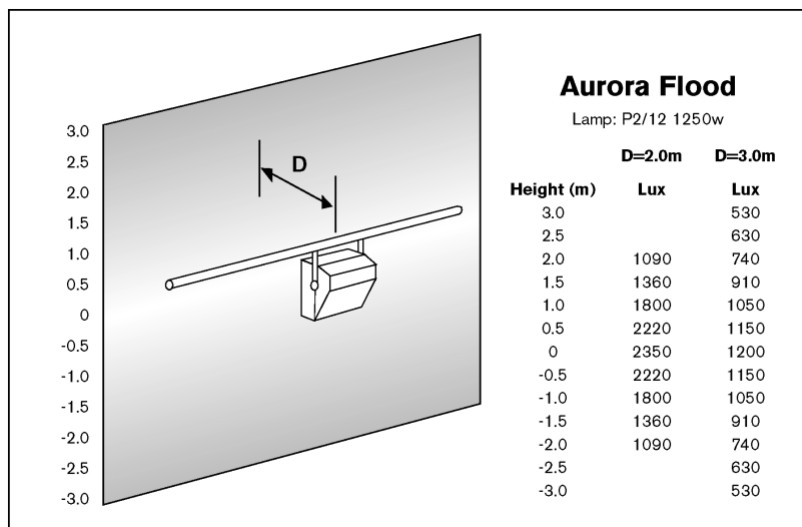

Physical data


Weight: 10.2kg

Packed weight: 11.4kg

Cubic: 0.073

Colour frame size: 305mm x 315mm

Included: 1x colour frame for single, 1 x M12 nut & bolt set, instruction sheet.

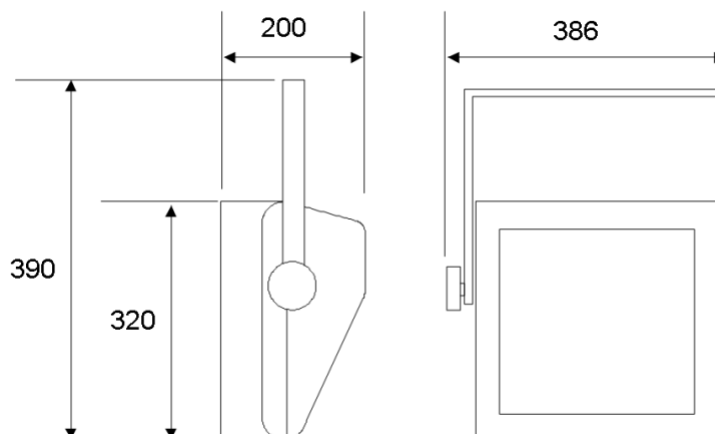

Selecon reserves the right to change the specifications without notice (06/08).