

# Product Specification Sheet

## Wing 200W Linear Wall Wash Flood



**Wing, Selecon's new range of Wall Washer Floods for high quality, efficient illumination of walls and general display lighting.**

**The Wing 200W Linear Wall Washer offers lighting designers and specifiers a traditional, tungsten halogen 'warm white' wall wash.**

### Features

Visually even wash of light with high colour rendering to evenly illuminate walls 3m and higher.

Beam edges are well defined but 'soft' allowing adjacent beams to blend together without distracting highlights.

Integrated stylish design with minimal visual impact on the architectural space.

Precision tilt and pan lock off adjustment and reference scale allowing for standardised set up and operation.

Light output is sufficient to allow for the use of colour filters.

Repeatability of performance is guaranteed through the extruded reflector design.

This unit supplied with Philips Plusline 200W linear tungsten halogen lamp; easy dimming capability.

### Approvals

C-Tick, CE.

### Accessories

Barndoor attachment with colour filter (glass or plastic) mounting frame – exterior matches the colour of the luminaire with an internal black finish for effective masking of the beam.



### Lamps

Supplied with Philips Plusline 200W tungsten halogen lamp.

Colour rendering Index: 100 Ra 8

Colour temperature: 3000K

Average life hours: 2,000

Luminous flux: 3250 Lm


Other lamps suitable for use in this luminaire: Osram Haloline Linear 150W and Philips Plusline Linear 300W.



### Colours



Black



White



Silver Grey  
RAL 2006

White = PANTONE® 11-4800  
Blanc de Blanc

### Orientation

For specified performance results position the luminaire to the 4.5 tilt reference datum point as indicated on the label.





## Order codes

Wing luminaires are supplied with the 200W Plusline lamp as specified:


	White	Grey	Black
<b>Ceiling Rose Mount</b>	SWWR7C01L200	SWWR7C02L200	SWWR7C03L200
<b>3ct Track Adapter Mount</b>	SWWR7T01L200	SWWR7T02L200	SWWR7T03L200
<b>Barndoor accessory including colour frame</b>	SWWBDS0103	SWWBDS0203	SWWBDS03

## Mounting options

Choice of ceiling rose mount or track adapter.



## Performance Data with 200W Plusline lamp

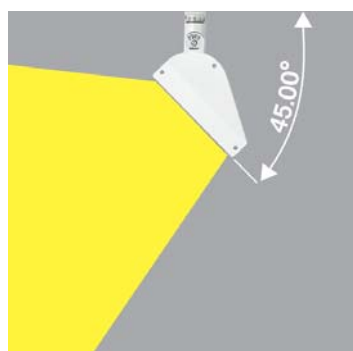

Wall Height - 3m.								
Luminaire distance from wall - m.	1.00		1.00		1.25		1.25	
Luminaire Spacing - m.	1.20		1.45		1.45		1.70	
	Below luminaire	Midway between luminaires	Below luminaire	Midway between luminaires	Below luminaire	Midway between luminaires	Below luminaire	Midway between luminaires
0.250	446	414	419	335	297	274	264	228
0.500	508	466	479	389	332	295	301	252
0.750	541	514	507	432	351	322	339	288
1.000	558	555	514	470	360	350	363	317
1.250	531	517	467	455	364	358	371	341
1.500	424	412	365	370	341	340	341	334
1.750	326	305	276	273	306	299	295	289
2.000	246	224	209	196	266	246	238	233
2.250	172	157	148	139	204	190	180	177
2.500	118	118	104	104	151	145	138	131
2.750	87	86	78	78	113	107	105	99




## Physical data

Luminaire with lamp, fitted with:

Track adapter: 1.35kg

Ceiling rose: 1.4kg

Barndoor: 0.625kg



Selecon reserves the right to change this product specification without notice (03/09).