



Product Specification Sheet

Lui Work Light



For overstage, rehearsal lighting the LUI Work Light provides a compact 90° flood beam.

The luminaire is fitted with a wire safety mesh instead of safety glass which allows the air flow system to work in any position for extended operating hours.

This model is not suitable for use with plastic colour filters; no colour frame is supplied.

Features

The LUI Work Light uses the 1000W K4 R7 lamp (189mm).

Relamp without having to break focus.

Mains Power Disconnect - microswitch isolation of the mains supply when opening to relamp (phase and neutral) protecting against a student or technician inserting a lamp into a live socket.

Mesh safety screen ensures that in the unlikely event of a lamp exploding that the remains are held captive within the luminaire.

Shape the beam and contain glare with the four-door barndoor accessory – fits all models.

Lamps: 220V-240V

1000W K4
24,000 lumens 2000 hours average life

Order Code

12LUIWK


Approvals

Fully tested and compliant to CE standards.

Physical Data


Weight: Single Work Light 4.1kg

Included: 1 x M12 suspension bolt set & instruction leaflet

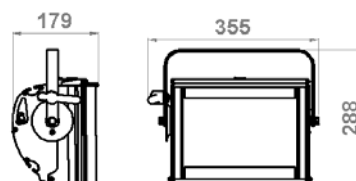

Photometric Data

Tests conducted using standard R7 189mm double-ended linear lamps: 1000W 240V.

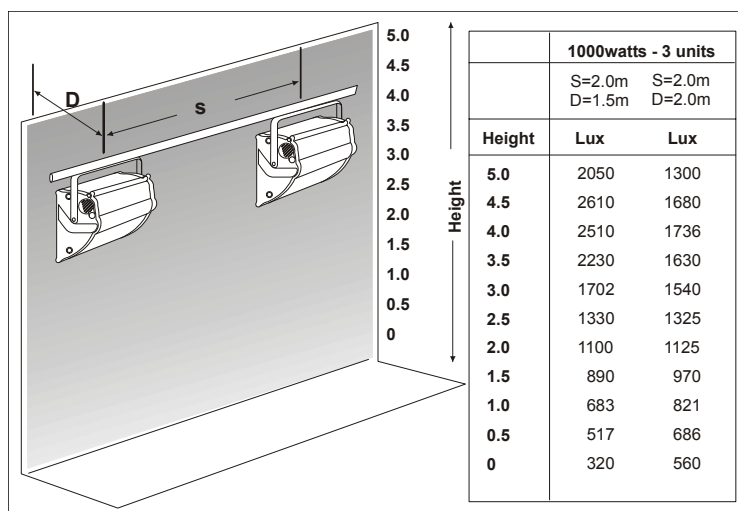

Selecon reserves the right to change the specifications without notice (12/08).